


Gravity Latch Kit

Model # - GLKUS

Installation Instructions

Step 1

Position both parts of the gravity latch kit on the gate frame and the post (fig. 1). The latch should always be mounted to the post and the striker bar to the gate frame. Mount the latch on the outside of the gate to make the gate swing out. Mount the latch on the inside of the gate to make the gate swing in. Position the latch on the post at the desired location. Mark the position of the mounting holes in the gravity latch. Drill a 1/8" pilot hole and mount to the post with the screws provided.

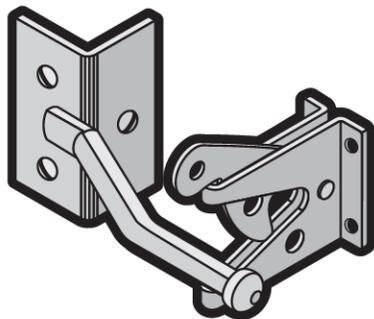

Step 2

Mark the position of the mounting holes in the striker bar. Drill a 1/8" pilot hole and mount to the gate frame with the screws provided.

Tools Required

- Pencil
- Tape measure
- Drill
- 1/8" steel drill bit
- Flat blade screwdriver

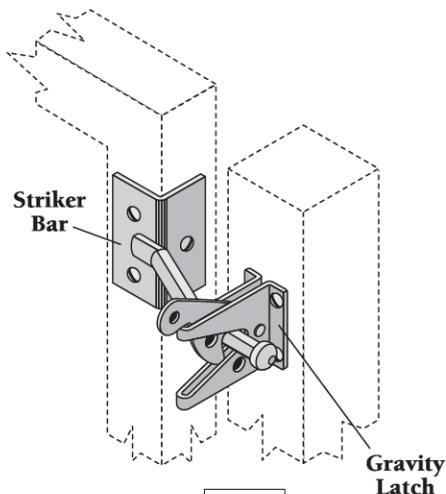


fig. 1



U.S. DOOR AND FENCE

U.S. Door and Fence, LLC., 3880 Garner Road, Riverside CA 92501-1066

For questions, please contact by phone(951)300-0010 or fax (951)300-0016

For warranty information, please contact warranty@usdoorfence.com

SKU # : 242785

GLKUS



MADE IN CHINA